



Smart is the save cost for UPS small to medium power in tower or rack form.

This model offers a great Solution for small computer centers, servers and for industrial applications.



Medical equipment



Shops



Small offices



Sensitive IT loads



Telecom



Critical buildings



Alarm & security systems



Small/medium data center

Smart RT UPS

Single Phase
Uninterruptible Power Supply

1KVA ~ 10KVA

www.itapower.it

Smart RT

Single Phase Uninterruptible Power Supply

1KVA ~ 10KVA




Smart is the save cost for UPS small to medium power in tower or rack form.

This model offers a great Solution for small computer centers, servers and for industrial applications.

highlights

- ① True double-conversion
- ① Microprocessor control optimizes reliability
- ① Input power factor correction
- ① Output power factor 0.9
- ① Wide input voltage range
- ① Converter mode available
- ① ECO mode for energy saving for 1-3KVA models
- ① Generator compatible
- ① Adjustable charging current via LCD (1A~6A)
- ① Emergency power off function (EPO) for 6K/10K
- ① Easy monitoring and access of UPS status by LCD

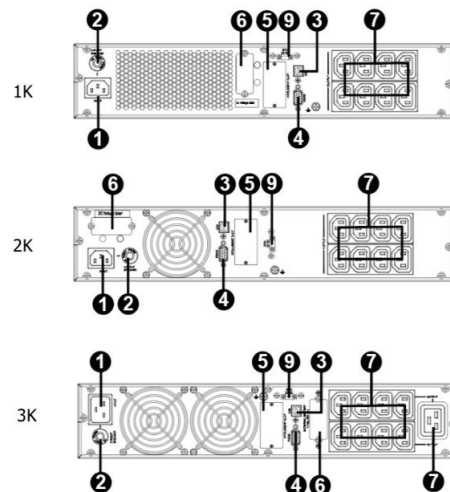

1. AC input
2. Input circuit breaker
3. USB communication port
4. RS-232 communication port
5. SNMP intelligent slot
6. External battery connection
7. Output receptacles
8. Output terminal
9. Emergency power off function connector (EPO connector)

MODEL	SMART RT 1000	SMART RT 2000	SMART RT 3000	SMART RT 6000	SMART RT 10000
P/N	SMR01	SMR02	SMR03	SMR06	SMR10
PHASE	Single phase with ground				
Capacity	1000 VA / 900 W	2000 VA / 1800 W	3000 VA / 2700 W	6000 VA / 5400 W	10000 VA / 9000 W
INPUT					
Nominal Voltage	200/208/220/230/240 VAC				
Voltage Range	180-300 VAC \pm 5% @ 100% load			176-300 VAC \pm 5% @ 100% load	
Frequency Range	40Hz ~ 70Hz			46~54 Hz or 56~64 Hz	
Power Factor	\geq 0.99 @ nominal voltage (100% load)				
OUTPUT					
Output Voltage	200*/208*/220/230/240 VAC				
AC Voltage Regulation (Batt. Mode)	\pm 1%				
Frequency Range (Synchronized Range)	47 ~ 53 Hz or 57~63Hz			46~54 Hz or 56~64 Hz	
Frequency Range (Batt. Mode)	50 Hz or 60Hz \pm 0.5%			50 Hz \pm 0.1 Hz or 60Hz \pm 0.1 Hz	
Current Crest Ratio	3:1 (max.)				
Harmonic Distortion	\leq 3 % THD (Linear Load); \leq 6 % THD (Non-linear load)			\leq 3 % THD (Linear Load); \leq 5 % THD (Non-linear load)	
Transfer Time	AC mode to Battery mode	Zero			
	Inverter to Bypass	4 ms (Typical)			Zero
Waveform (Batt. Mode)	Pure Sinewave				
EFFICIENCY					
AC Mode	\geq 88%	\geq 89%	\geq 90%	\geq 92%	\geq 93%
Battery Mode	\geq 83%	\geq 85%	\geq 88%	\geq 90%	\geq 91%
BATTERY					
Battery Type	12 V / 9 AH	12 V / 9 AH	12 V / 9 AH	12V-7Ah or 12V /9Ah	
Numbers	2	4	6	16-20 in external battery cabinet	
Typical Recharge Time	4 hours recover to 90% capacity			9 Hours to 90% capacity	
Charging Current	1.0 A			1A/2A (Adjustable)	
Charging Voltage	27.4 VDC \pm 1%	54.8 VDC \pm 1%	82.1 VDC \pm 1%	218.4 VDC \pm 1%	
PHYSICAL					
Dimension, D X W X H (mm)	410 x 438 x 88	510 x 438 x 88	630 x 438 x 88	610 X 438 X 88 (2U)	611 X 438 X 88 (2U)
Net Weight (without battery) (kgs)	6,6	9,4	12,4	12	16
Net Weight (w/built-in battery) (kgs)	11,6	19,5	27,5	17	20
ENVIRONMENT					
Humidity	20-90 % RH @ 0- 40°C (non-condensing)				
Noise Level	Less than 50dBA @ 1 Meter			Less than 55dBA @ 1 Meter	
Altitude	10% de-rating for over 1000m (The altitude should not exceed 3000m)				
IP Rating	IP 20				
MANAGEMENT					
Smart RS-232/USB	Supports Windows® 2000/2003/XP/Vista/2008/7/8, Linux and MAC				
Optional SNMP	Power management from SNMP manager and web browser				
STANDARD					
EMC/safety	EMC EN62040-2 C2 for CE models				

Product specifications are subject to change without further notice.

